


## FEATURES

- Used with Flex 3 system
- Rated for use on 20 ampere branch circuits
- Internally wired with 90°C insulated, #12 AWG, solid copper conductors
- Fixture cord drop manufactured from S.E.O. Cord
- Tap Conductors are 105°C insulated, #16 AWG, stranded copper conductors with a #16 AWG stranded copper ground
- Connector housing is zinc-plated, .060 inches cold-rolled steel
- Pin and sleeve connector design
- Can be field wired or factory installed and shipped with fixtures
- IBEW Assembled
- UL listed and labeled

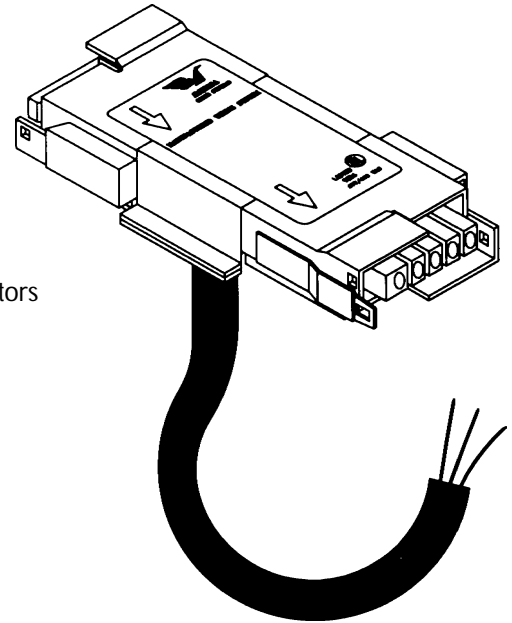

## APPLICATION

The heart of the Flex3 modular wiring system, the Lighting "T" with Cord Drop is used with the Distribution Cable and Extender Cable. It delivers branch circuit power to the lighting fixture. The Lighting "T" system allows for the removal of a lighting fixture by simply unplugging the Extender Cables, removing the lighting fixture and Lighting "T" Cord, and reconnecting the Extender Cables to each other.

## COMPONENT INFORMATION

Catalog #'s	Description	Colors
<b>120 Volts</b>		
1CA*	Single circuit, 2-wire w/ground	black, white & green
1CB*	Two circuit, 3-wire w/ground	black, red, white & green
1CC*	Three circuit, 4-wire w/ground	black, red, orange, white & green
1CD*	Single circuit, B phase, 2-wire w/ground	black, white & green
1CF*	Single circuit, C phase 2-wire w/ground	black, white & green
<b>277 Volts</b>		
2CA*	Single circuit, 2-wire w/ground	black, white & green
2CB*	Two circuit, 3-wire w/ground	black, red, white & green
2CC*	Three circuit, 4-wire w/ground	black, red, orange, white & green
2CD*	Single circuit, B phase, 2-wire w/ground	black, white & green
2CF*	Single circuit, C phase 2-wire w/ground	black, white & green

STANDARD LENGTHS
1.5 FT.
3 FT.
6 FT.

### HOW TO ORDER

2 C A 7

↑ ↑ ↑ ↑

Cable length in feet (7')

No. of wires (A=2-wire w/ground)

Function (C= Cord Drop Cable)

Voltage (1 = 120V, 2 = 277V)

\* Denotes cable length in feet.




Made in the USA

260 Duchaine Boulevard, New Bedford, MA 02745  
800-426-3170 • fax: 508-998-7720 • www.afcweb.com/acs

**tyco** / Electrical & Metal Products

Weight	1.0 pounds
Construction Cord Conductors Ground Conductor	Stow a PVC cord Rated-20°C to 75°C 105°C Insulated #16AWG, Stranded #16AWG Stranded
Contact	0.016" tinned copper alloy
Contact Housing Material Keying	Polycarbonate, UL 94V-2 Complies with NEC 604-6 (b)
Connector Housing & Strain Relief Material Plating Attaching Hardware	0.060" cold-rolled steel Zinc Bright Dip Rivet, steel, zinc plated
Latch	#3 zinc alloy, die cast
Latch Strike Material Plating	0.028 AISI 1075 Cold-rolled spring steel black oxide

## KEY DIMENSIONS

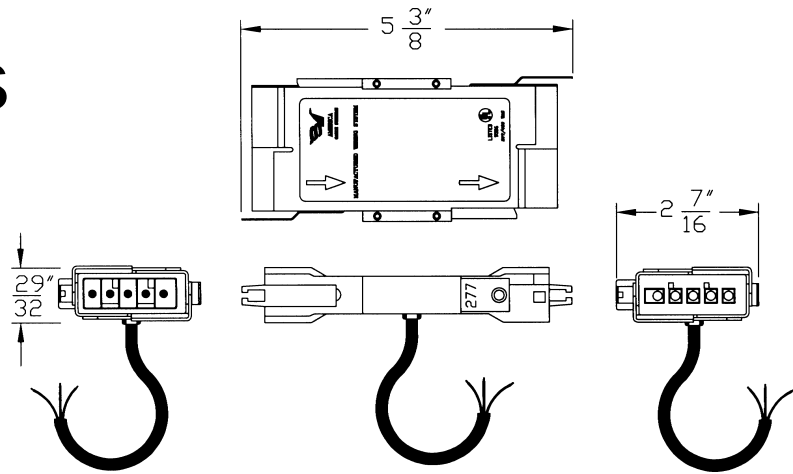

## SYSTEM VIEW

