


## FEATURES

- Rated for use on 120V/208V 20 ampere branch circuits
- Manufactured with Type MC Cable featuring 90°C insulated, #12 AWG, solid copper conductors
- Connector housing is zinc-plated 0.060 inches cold-rolled steel
- High conductivity pin and socket connector design
- To eliminate inter-voltage connection, each connector is keyed and color-coded to meet specific voltage requirements
- IBEW-assembled, UL-listed and labeled
- Meets requirements of NEC® Article 604
- Acceptable for use in environmental air-handling spaces other than ducts or plenums per NEC Article 300-22(c)

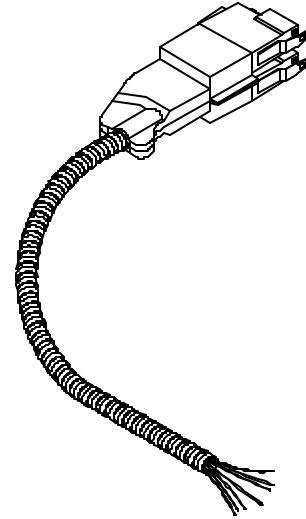


## APPLICATION

The **Whip End Power Extender Cable** allows the IF/IC modular wiring system to interconnect with hard-wired assemblies, such as Access Floor Modules, electrical work boxes, or inaccessible areas where wall-mounted convenience outlets are located. Normally, it delivers power from the Power Extender Cables to the Access Floor Modules. Cables are configured for General Purpose (GP) power and Isolated Ground (IG) power. Custom circuitry configurations are available.

## ORDERING INFORMATION

### Catalog Number

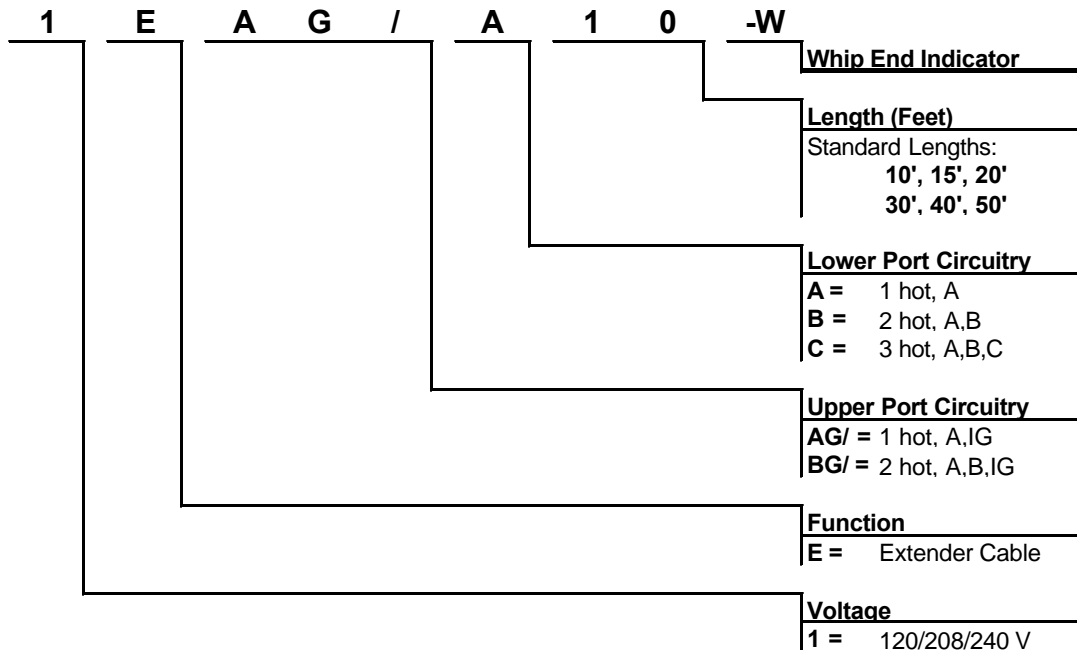

**THE INTELLIGENT FLOOR<sup>â</sup>**  
**THE INTELLIGENT CEILING<sup>â</sup>**

**DOUBLE  
PORT**


**WHIP END  
POWER EXTENDER CABLE**

## SPECIFICATIONS


<b>Weight</b>	10 pounds (10' length)
<b>Length</b>	Unrestricted by NEC
<b>Minimum Coil Diameter</b>	9 inches (inner diameter)
<b>Cable</b>	<ul style="list-style-type: none"> <li>Type</li> <li>Conductor</li> <li>Conductor Size</li> <li>Ground Conductor</li> </ul>
<b>Contact</b>	<ul style="list-style-type: none"> <li>Material</li> </ul>
<b>Contact Housing</b>	<ul style="list-style-type: none"> <li>Material</li> <li>Keying</li> </ul>

<b>Connector Housing</b>	<ul style="list-style-type: none"> <li>Material</li> <li>Finish</li> <li>Attaching Hardware</li> </ul>	<ul style="list-style-type: none"> <li>0.060" cold-rolled steel</li> <li>Bright zinc dip</li> <li>Rivet, steel, zinc plated</li> </ul>
<b>Latch</b>	<ul style="list-style-type: none"> <li>Material</li> </ul>	<ul style="list-style-type: none"> <li>#3 zinc alloy, die cast</li> </ul>
<b>Latch Strike</b>	<ul style="list-style-type: none"> <li>Material</li> <li>Plating</li> </ul>	<ul style="list-style-type: none"> <li>0.028 AISI 1075 cold-rolled spring steel</li> <li>Black oxide</li> </ul>


## KEY DIMENSIONS

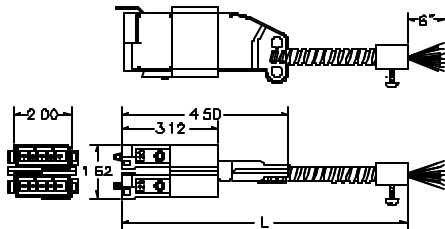

## PIN ASSIGNMENTS



## SYSTEM VIEW

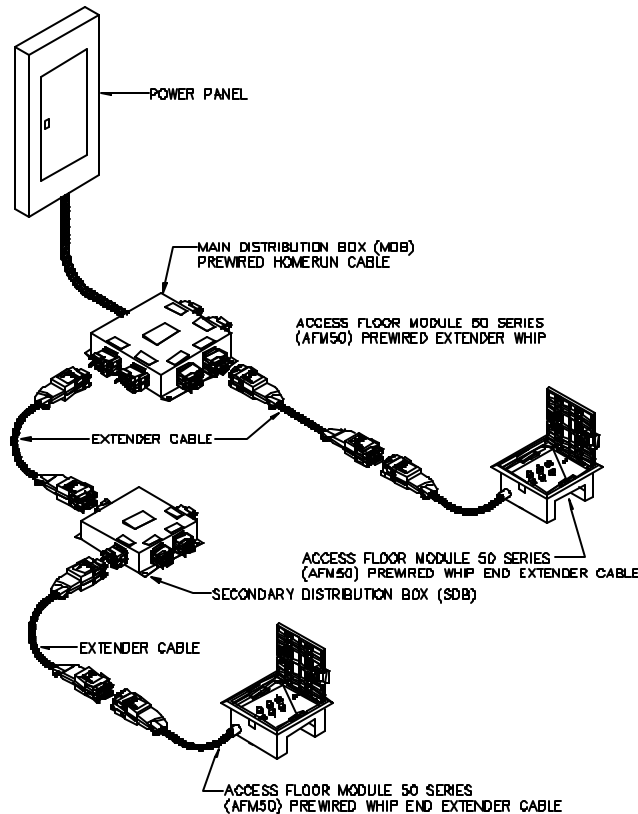

2505 Merritt Drive, Garland, TX 75041  
 972-278-3888 fax: 972-248-8585 [www.afcweb.com/acs](http://www.afcweb.com/acs)  
 Made in the USA

**tyco** / Electrical & Metal Products