


FEATURES

- Fits access floors with 5” clearance from finished floor level
- Manufactured with 0.0625 inch galvanized steel
- Capacity for up to five duplex power receptacles
- Capacity for up to three data plates for up to 18 data ports
- Powder-coated steel cover includes two integrated cable exits and carpet insert area
- Locking tabs easily actuated to secure AFM to floor tile
- Factory-assembled and pre-wired with ACS modular wiring system
- IBEW-assembled, UL-listed and labeled

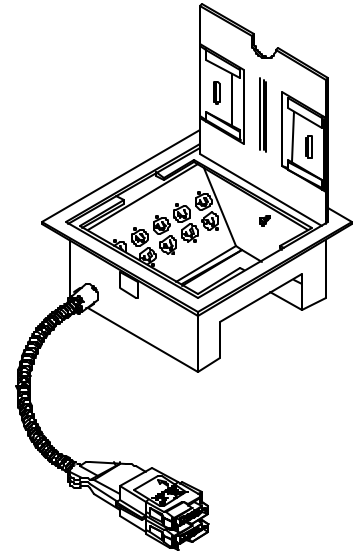


APPLICATION

The **AFM5010 Access Floor Module** contains the user interface to power and telecommunications wiring that is distributed below a raised floor. Easily integrated into the Intelligent Floor system, the AFM5010 can be equipped with both General Purpose (GP) power and Isolated Ground (IG) power receptacles, as well as industry standard telecommunications connectors from most vendors. The AFM5010 is typically supplied factory assembled and pre-wired with a Whip End Power Extender Cable. Custom circuitry configurations and cover colors are available.

ORDERING INFORMATION

Catalog Number

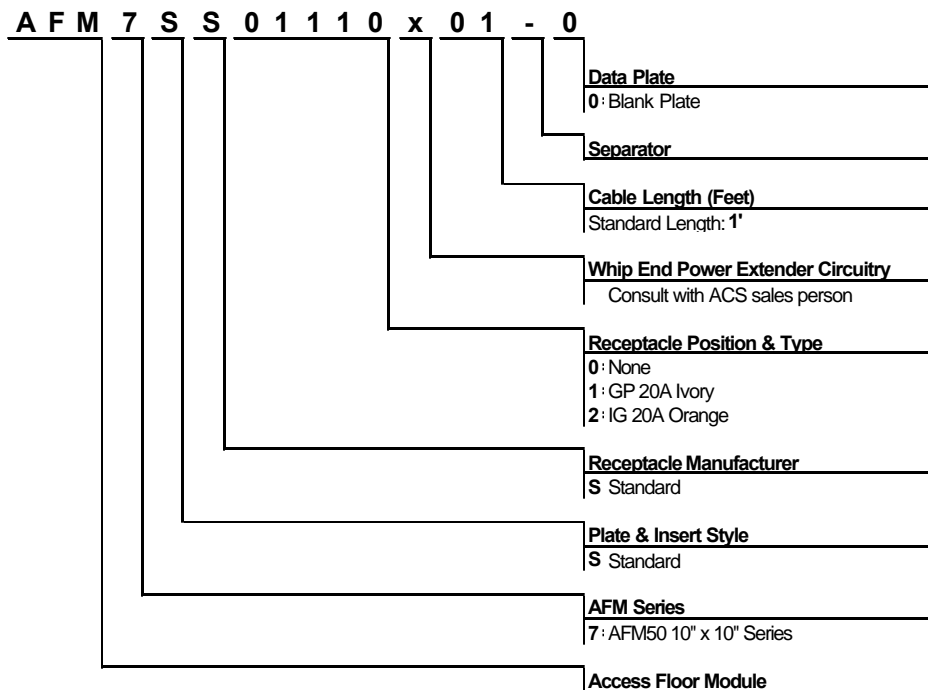


SPECIFICATIONS

Weight • with Metal Cover	• 22 pounds
Size • Box with Cover • Cover Trim Ring • Floor Tile Cutout • Cover Door	• 10.25" x 10.25" x 5" (LxWxD) • 12" x 12" • 10.625" x 10.625" • 10.25" x 10.25"
Volume • Power Wiring Chamber • Telecom Wiring Chamber • Cord Chamber	• 88 cu inches • 88 cu inches • 324 cu inches

Box • Material • Finish • Thickness	• Steel • Galvanized zinc • 0.0625 minimum
Metal Cover • Material • Finish • Standard Color	• 0.074" cold-rolled steel • Powder coat • Black

KEY DIMENSIONS

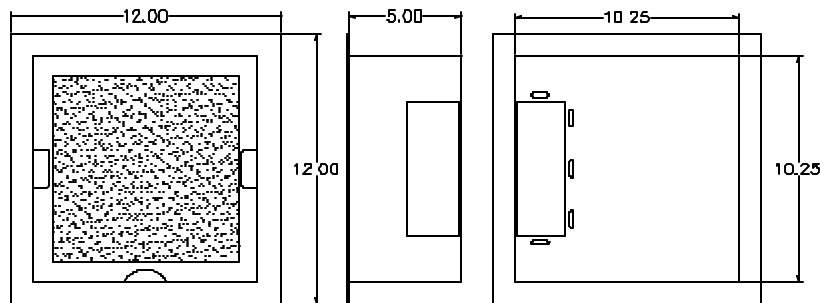

SYSTEM VIEW

